

# COFFEE BREWING SYSTEMS

## CBS-1250 Plus Brewers

### 1.5-2.0 GALLON BREWING SYSTEM

Shown with D449 6.0L / 1.5G LUXUS® Thermal Dispenser



#### PLUG AND PLAY OPERATION

Batch buttons are pre-programmed at the factory. If desired the USB port can be used to upload and download recipes.



#### CASCADING SPRAY DOME

Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design makes for less service calls.

# DISPENSERS

## CBS-1250 Plus Brewers

### DISPENSERS

**D449**

6.0 Liter / 1.5 Gallon  
LUXUS® Thermal  
Dispenser  
L4D-15

NSF



**D480**

6.0 Liter / 1.5 Gallon  
LUXUS® Sight Gauge  
Dispenser  
LGD-15

NSF



**D009**

6.0 Liter / 1.5 Gallon  
LUXUS® Portable  
Thermal Dispenser  
TPD-15

NSF



All dispensers **SOLD SEPARATELY.**

**D450**

8.0 Liter / 2.0 Gallon  
LUXUS® Thermal  
Dispenser  
L4D-20

NSF



FOR USE WITH  
CBS-1253 PLUS BREWER

**D481**

8.0 Liter / 2.0 Gallon  
LUXUS® Sight Gauge  
Dispenser  
LGD-20

NSF



FOR USE WITH  
CBS-1253 PLUS BREWER



#### BREW BASKET DESIGN

Advanced brew basket design provides a deeper bed depth and superior thermal insulation for better extraction.



#### CONTEMPORARY DESIGN

Traditional FETCO core with modern design enhancements fits well in any front-of-house or back of the house application.



#### ECO MODE

Reduces tank temperature during periods of non-operation to cut down on electricity usage.

## ACCESSORIES

### CBS-1250 Plus Brewers

#### NOTE

Coffee brewers are available with **Plastic** or **Metal** brew basket options. Material type is of personal preference and does not affect flavor profile, however if you are looking for color identification the plastic brew baskets are the best option.

#### BREW BASKETS AND PAPER FILTERS

Item Number	Brew Basket	Coffee Capacity	Filter Size	Filter SKU	Filter/Case
All configurations	Standard <b>Plastic</b> / Stainless Steel	Up to 12oz / 340g	15" x 5.5"	F001	500/cs

**B001280B1**  
16" x 6"  
Stainless Steel  
Brew Basket



**B015280BN2BK**  
16" x 6"  
Plastic Brew  
Basket



**F001**  
15" x 5.5"  
Paper Filters



Contact Customer Service or your Sales Person for more options.

#### COLORED BREW BASKET HANDLE INSERTS

**1023.00180.00**  
Blue Insert



**1023.00190.00**  
Red Insert



**1023.00191.00**  
Green Insert



**1023.00192.00**  
Orange Insert



#### WATER FILTRATION SYSTEM

Filtration System	Item Number	Item Description	Rated Capacity	Working Pressure	Weight
Everpure®	A039	In-Line System	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
Everpure®	A075	Replacement Cartridge	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
BWT Bestmax	A138	In-Line System	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A139	Replacement Cartridge	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A140	In-Line System	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A141	Replacement Cartridge	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg

**EVERPURE®**  
In-Line Water  
Filtration System



**SET INCLUDES:** 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve

**BWT BESTMAX**  
In-Line Water  
Filtration System



**SET INCLUDES:** 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences

# TECHNICAL SPECIFICATIONS

## NORTH AMERICA

### CBS-1251 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1251US-1B230-MM110	16x6" Metal	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.0 / 56.9	NSF c UL US
E1251US-1B230-PM110	16x6" Plastic	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.0 / 56.9	NSF c UL US

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	5.89 / 22.30

### CBS-1252 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1252US-UB230-MM110 DUAL PHASE	16x6" Metal	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.9 / 60.4	NSF c UL US
		208-240	3 x 3.0 kW / 240 V	3	3+G	6.9-9.1	No Cord	19.2-22.1	23.9 / 90.6	
E1252US-UB230-PM110 DUAL PHASE	16x6" Plastic	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.9 / 60.4	NSF c UL US
		208-240	3 x 3.0 kW / 240 V	3	3+G	6.9-9.1	No Cord	19.2-22.1	23.9 / 90.6	
E1252US-UB250-MM110 DUAL PHASE	16x6" Metal	208-240	2 x 5.0 kW / 240 V	1	2+G	7.6-10.1	No Cord	36.5-42.1	26.6 / 100.7	NSF c UL US
		208-240	3 x 5.0 kW / 240 V	3	3+G	11.4-15.1	No Cord	31.7-36.5	30.0 / 113.7	
E1252US-UB250-PM110 DUAL PHASE	16x6" Plastic	208-240	2 x 5.0 kW / 240 V	1	2+G	7.6-10.1	No Cord	36.5-42.1	26.6 / 100.7	NSF c UL US
		208-240	3 x 5.0 kW / 240 V	3	3+G	11.4-15.1	No Cord	31.7-36.5	30.0 / 113.7	

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	10.48 / 39.67

### CBS-1253 Plus 2.0 Gallon Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1253US-UB230-MM110 DUAL PHASE	16x6" Metal	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.9 / 60.4	NSF c UL US
		208-240	3 x 3.0 kW / 240 V	3	3+G	6.9-9.1	No Cord	19.2-22.1	23.9 / 90.6	
E1253US-UB230-PM110 DUAL PHASE	16x6" Plastic	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.9 / 60.4	NSF c UL US
		208-240	3 x 3.0 kW / 240 V	3	3+G	6.9-9.1	No Cord	19.2-22.1	23.9 / 90.6	
E1253US-UB250-MM110 DUAL PHASE	16x6" Metal	208-240	2 x 5.0 kW / 240 V	1	2+G	7.6-10.1	No Cord	36.5-42.1	26.6 / 100.7	NSF c UL US
		208-240	3 x 5.0 kW / 240 V	3	3+G	11.4-15.1	No Cord	31.7-36.5	30.0 / 113.7	
E1253US-UB250-PM110 DUAL PHASE	16x6" Plastic	208-240	2 x 5.0 kW / 240 V	1	2+G	7.6-10.1	No Cord	36.5-42.1	26.6 / 100.7	NSF c UL US
		208-240	3 x 5.0 kW / 240 V	3	3+G	11.4-15.1	No Cord	31.7-36.5	30.0 / 113.7	

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	10.48 / 39.67

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.

# TECHNICAL SPECIFICATIONS

## INTERNATIONAL

### CBS-1251 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1251IN-1B140-PM110	16x6" Plastic	200-240	1 x 4.0 kW / 240 V	1	L/N/PE	2.9-4.1	No Cord	14.3-17.1	10.6 / 40.3	NSF cUL <sub>US</sub>
E1251IN-1B150-PM110	16x6" Plastic	200-240	1 x 5.0 kW / 240 V	1	L/N/PE	3.6-5.1	No Cord	17.8-21.2	13.3 / 50.4	NSF cUL <sub>US</sub>
E1251IN-1B230-PM110 <sup>1</sup>	16x6" Plastic	200-240	2 x 3.0 kW / 240 V	1	L/N/PE	4.3-6.1	No Cord	21.2-25.4	15.0 / 56.9	NSF cUL <sub>US</sub>
E1251NM-1B230-PM110	16x6" Plastic	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.0 / 56.9	NSF NOM
E1251CE-2C230-PM110	16x6" Plastic	230/400	2 x 3.0 kW / 240 V	1	2L/N/PE	5.6	No Cord	12.4	14.9 / 56.4	NSF CE
E1251CE-1B230-PM110	16x6" Plastic	230	2 x 3.0 kW / 240 V	1	L/N/PE	5.6	No Cord	24.4	14.9 / 56.4	NSF CE

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	5.89 / 22.30

### CBS-1252 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1252IN-3C330-PM110 <sup>1</sup>	16x6" Plastic	220/380-240/415	3 x 3.0 kW / 240 V	3	3L/N/PE	7.7-9.1	No Cord	11.9-12.9	23.9 / 90.6	NSF cUL <sub>US</sub>
E1252IN-3C350-PM110 <sup>1</sup>	16x6" Plastic	220/380-240/415	3 x 5.0 kW / 240 V	3	3L/N/PE	12.7-15.1	No Cord	19.6-21.3	30.0 / 133.7	NSF cUL <sub>US</sub>
E1252IN-1B230-PM110 <sup>1</sup>	16x6" Plastic	200-240	2 x 3.0 kW / 240 V	1	L/N/PE	4.3-6.1	No Cord	21.2-25.4	15.9 / 60.4	NSF cUL <sub>US</sub>
E1252IN-1B250-PM110	16x6" Plastic	220/380-240/415	2 x 5.0 kW / 240 V	1	L/N/PE	7.0-10.1	No Cord	35.1-42.1	26.6 / 100.7	NSF cUL <sub>US</sub>
E1252IN-3C340-PM110	16x6" Plastic	240/415	3 x 4.0 kW / 240 V	3	3L/N/PE	10.2-12.1	No Cord	15.7-17.1	30.0 / 113.7	NSF cUL <sub>US</sub>
E1252NM-1B250-PM110	16x6" Plastic	208-240	2 x 5.0 kW / 240 V	1	2+G	7.6-10.1	No Cord	36.5-42.1	26.6 / 100.7	NSF NOM
E1252NM-UB250-PM110 <sup>1</sup> DUAL PHASE	16x6" Plastic	208-240 208-240	2 x 5.0 kW / 240 V 3 x 5.0 kW / 240 V	1 3	2+G 3+G	7.6-10.1 11.4-15.1	No Cord	36.5-42.1 31.7-36.5	26.6 / 100.7 30.0 / 113.7	NSF NOM
E1252CE-3C330-PM110	16x6" Plastic	230/400	3 x 3.0 kW / 240 V	3	3L/N/PE	8.4	No Cord	12.3	22.1 / 83.6	NSF CE
E1252CE-3C350-PM110	16x6" Plastic	230/400	3 x 5.0 kW / 240 V	3	3L/N/PE	13.9	No Cord	20.3	30.0 / 113.7	NSF CE

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	10.48 / 39.67

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.


# DIMENSIONS

## CBS-1251 Plus Brewer

DIMENSIONS							WEIGHT		
	Height (A)	Width (B)	Depth (D)	Depth (E)	Brew Basket Clearance (F)	Faucet Clearance (G)		Empty [lbs] / [kg]	Filled [lbs] / [kg]
<b>Product Dimensions</b>	36.88" 93.67 cm	12.75" 32.38 cm	22.5" 57.15 cm	17.13" 43.51 cm	22.5" 57.15 cm	12.13" 30.80 cm	<b>Product Weight</b>	53 lbs 24.0 kg	106 lbs 48.1 kg
<b>Shipping Dimensions</b>	37.0" 93.98 cm	18.0" 45.72 cm	24.0" 60.96 cm	N/A	N/A	N/A	<b>Shipping Weight</b>	63 lbs 28.5 kg	N/A

## CBS-1252 Plus Brewer

DIMENSIONS							WEIGHT		
	Height (A)	Width (C)	Depth (D)	Depth (E)	Brew Basket Clearance (F)	Faucet Clearance (G)		Empty [lbs] / [kg]	Filled [lbs] / [kg]
<b>Product Dimensions</b>	36.88" 93.67 cm	21.88" 55.57 cm	22.5" 57.15 cm	17.13" 43.51 cm	22.5" 57.15 cm	12.13" 30.80 cm	<b>Product Weight</b>	77 lbs 34.9 kg	174 lbs 78.8 kg
<b>Shipping Dimensions</b>	37.0" 93.98 cm	24.0" 60.96 cm	27.0" 68.58 cm	N/A	N/A	N/A	<b>Shipping Weight</b>	97 lbs 44.0 kg	N/A

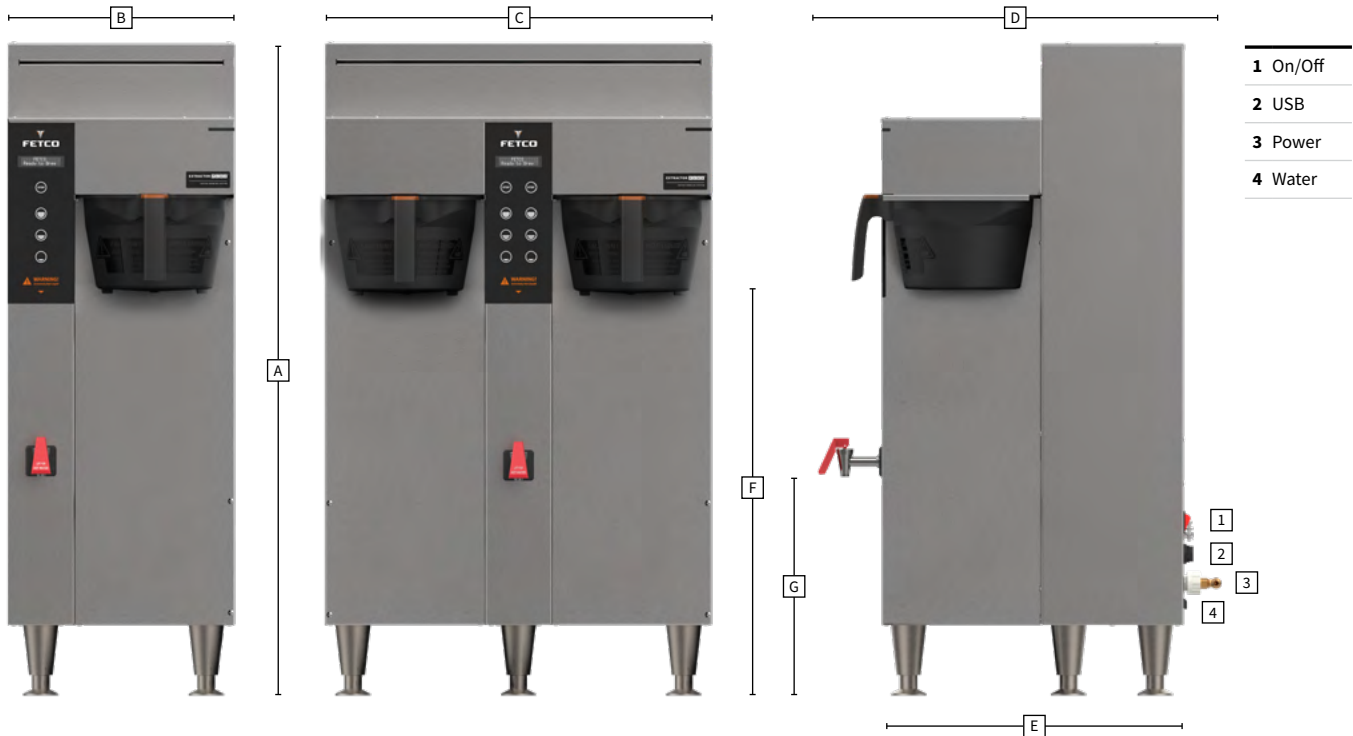

FAX  
+1.847.719.3001